Data Sheet

Girder Truss Shoe

Description

Manufactured from 1mm thick hot dipped galvanised mild steel to BS2989 grade G275 (z2) coating for truss to truss connections at girders or truss beams.

Available in 38mm, 50mm, 63mm, 75mm and 100mm.

It is recommneded that 30 x 3.75mm square twisted galvanised nails to be used in all holes provided. (See nail section in the catalogue for details).

Size	Unit
38mm	each
50mm	each

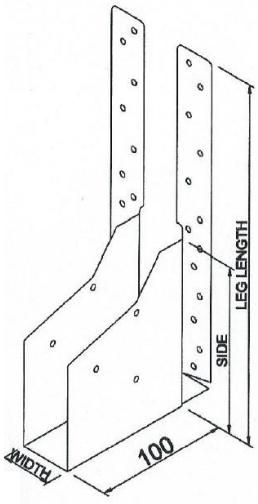

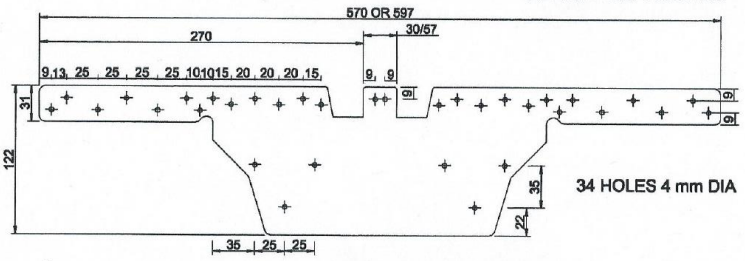

Principal Building Products Ltd, Barbot Hall Industrial Estate, Mangham Road, Rotherham, S61 4RJ, Telephone: 01709 728150 Email: sales@pbpltd.co.uk