


## Data Sheet

### Lead Alternative Flashing

Sustainable, safe and lightweight alternative to lead for use on roofs and facades

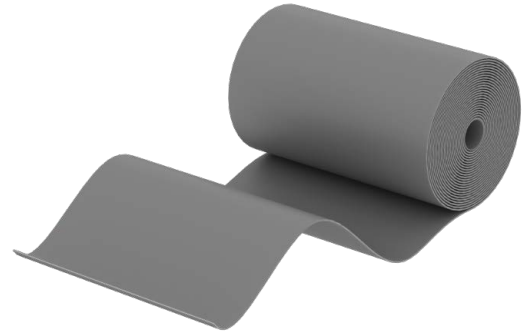

#### Application

- Use in areas where there should be a watertight connection between roofing elements (chimneys, abutments, dormers)

#### Product Features & Benefits

- Solid (non-laminated) 2.4 mm thickness
- 85% Lighter than code 4 lead
- Easy to cut and dress
- Integrated aluminium mesh for better profiling and shaping
- No staining & no patination
- Anti-theft due to no scrap value
- Very resistant to UV
- Not harmful to touch

#### Materials

- High-quality EPDM rubber flashing reinforced with aluminium mesh
- Weight at 2.55kg/m<sup>2</sup>
- Reaction to fire class E

#### Installation Guide

- Install as if working in lead, this is as an alternative to lead to perform as a water barrier
- Overlap to min 50mm (typical 100mm)
- Seal overlaps using EPDM sealant or with hot air gun



#### Product Range

Description	Full Length	Width	Weight	Pack Qty
Lead alternative flashing 150mm (Graphite)	5mtr	150mm	2.25kg	ea
Lead alternative flashing 200mm (Graphite)	5mtr	200mm	3.06kg	ea
Lead alternative flashing 300mm (Graphite)	5mtr	300mm	4.5kg	ea
Lead alternative flashing 450mm (Graphite)	5mtr	450mm	6.75kg	ea
Lead alternative flashing 600mm (Graphite)	5mtr	600mm	9kg	ea
EPDM sealant (solvent free)	sausage	600ml	-	ea