




RHINOPLAST 400 EXTRA RADON BARRIER

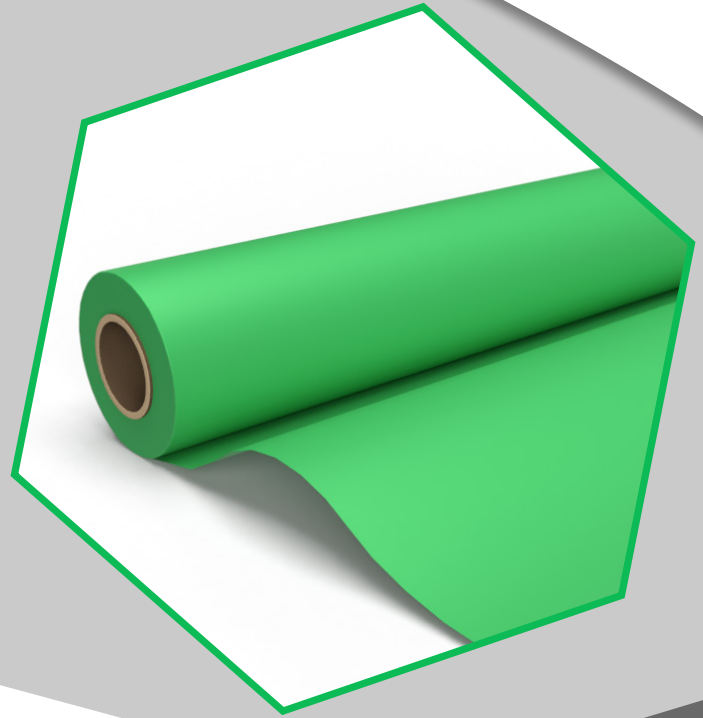

4m x 20m



400mu



Green

Product Data

Test Unit	Mean Results
Roll Size	4m x 20m
Thickness (µm)	400mu
Tensile strength (N.mm ⁻²)	9.9
Elongation (%)	500
Nail tear resistance (N)	235
Resistance to static loading (kg)	20
Watertightness (2 kPa)	Pass
Durability (Artificial Ageing)	Pass
Durability against chemicals	Pass

Resistance to underground gases		
Gas	Method	Result
Radon	K124/02/95	7.2 x 10 ⁻¹² m ² .s ⁻¹

System Components

- Rhinoplast LT Joint Strip
- Rhinoplast High Tack Girth Tape
- Pre-formed Cloaks, Details & Top Hats
- Radon Sump Units

- ✓ Meets the requirements of BR211:2015
- ✓ Tough, durable & flexible
- ✓ Multi-fold for ease of handling & storage
- ✓ Weldable & easy to install
- ✓ CE Mark EN 13967
- ✓ Also acts a damp proof membrane
- ✓ Full range of tapes, preformed cloaks and tophats to suit